


- |        |        |                                       |
|--------|--------|---------------------------------------|
| α      | degree | Unstressed leg position               |
| α1     | degree | Prestressed rotational angle          |
| α2     | degree | Loaded rotational angle               |
| αh     | degree | Excursion                             |
| αn     | degree | Maximum rotational angle              |
| d      | mm     | Wire diameter                         |
| Ddmin  | mm     | Min. possible mandrel diameter        |
| Ddmax  | mm     | Max. possible mandrel diameter        |
| De     | mm     | Outer coil diameter                   |
| Di     | mm     | Inner coil diameter                   |
| F1     | N      | Prestressed spring force              |
| F2     | N      | Loaded spring force                   |
| Lk0    | mm     | Length of spring body when relaxed    |
| LS     | mm     | Length of leg                         |
| M1     | Nmm    | Prestressed torque                    |
| M2     | Nmm    | Loaded torque                         |
| Mn     | Nmm    | Maximum torque                        |
| n      | pc.    | Active coils                          |
| RH     | mm     | Distance power flow point from centre |
| St     | mm     | Distance between coils (pitch)        |
| Weight | g      | Weight of one spring in grammes       |

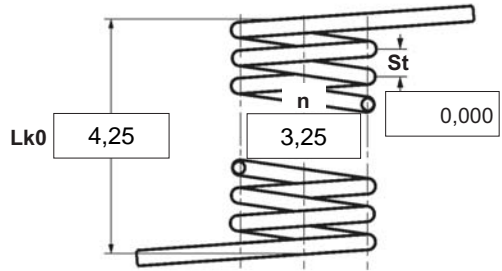

Spring test acc. to DIN ISO 2859/1 test level II

**1 Coiling direction**

 left   right

**2 Form of legs**

tangential, straight, no bends \*



\*We can also supply torsion springs with any form of leg for an extra charge.

**3 Fixing**

Recumbent leg  Lever leg

**4 Load**

in winding direction  
 against winding direction

**5 Excursion αh**

degr.

**6 Stress cyc. end. N**

**7 Stress cycle frequ. n**

/

**8 Application temp.**

°C

**9 Material**

1.4310

**10 Wire or rod surface**

drawn  rolled  metal-cut

**11 Surface treatment**

**12 Tolerances to DIN 2194**

Grade	Di	Lk0	LSH,LSR	α, α1, α2	M1, M2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**13 Production compensation through**

A spring torque and the associated swing angle	α	<input checked="" type="checkbox"/>
A spring torque and the associated swing angle and α0	n, d	<input type="checkbox"/>
	n, Di	<input type="checkbox"/>
Two spring resistances and the associated swing angle	α, n, d	<input type="checkbox"/>
	α, n, Di	<input type="checkbox"/>

**Prices**

Stupnice množství	Jedn. cena [EUR]
1	5,1100 €
2	3,6000 €
3	3,4300 €
7	2,2200 €
17	1,1200 €
37	0,7400 €
75	0,5500 €
125	0,4570 €
175	0,4069 €
250	0,3567 €
350	0,3095 €
450	0,2652 €

**Remarks**

Zem pvodu: DE | íslo celného sazebníku: 73202089