


d mm	Wire diameter	Fn N	Maximum force in static use	nt	pc.	Total coils	
D mm	Mean coil diameter	Fc N	Theoretic maximum force at Lc	R	N/mm	Spring rate	
Dd mm	Diameter of mandrel	L0 mm	Length of unstressed spring	S	mm	Pitch (distance between coils)	
De mm	Outer coil diameter	L1 mm	Prestressed spring length	s1	mm	Prestressed spring deflection	
Dh mm	Diameter of bush	L2 mm	Loaded spring length	s2	mm	Loaded spring deflection	
e1 mm	Perm.dev. perpendicular line	Lk mm	Buckling length	sh	mm	Maximum stroke in static use	
e2 mm	Perm.dev. parallel line	Ln mm	Minimum length in static use	sn	mm	Maximum spring deflection in static use	
F1 N	Prestressed spring force	Lc mm	Block length	Weight	g	Weight of one spring in grammes	
F2 N	Loaded spring force	n pc.	Active coils	Fndyn	N	Maximum force in dynamic force	
				Fndtol	N	(+/-) tolerance of maximum dynamic force	
				Lndyn	mm	Minimum length in dynamic use	
				shdyn	mm	Maximum stroke in dynamic use	

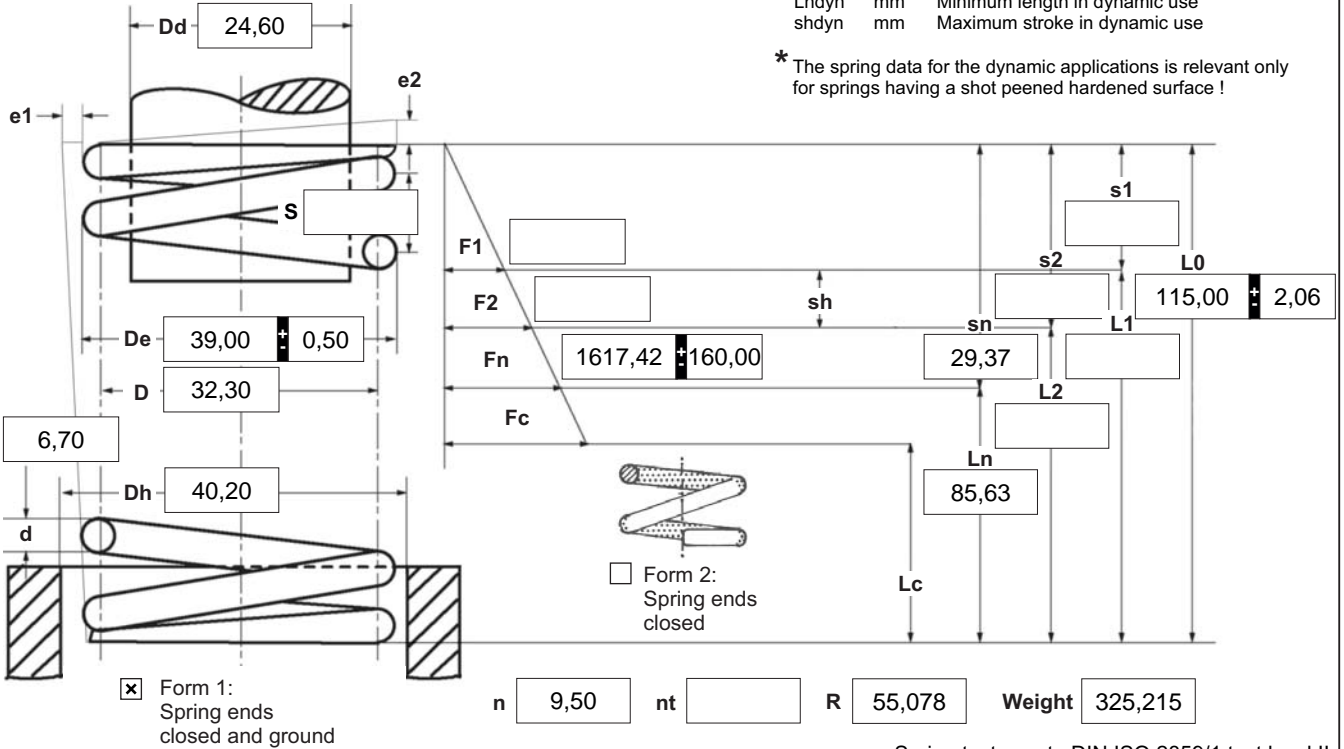

\* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

Spring test acc. to DIN ISO 2859/1 test level II

**1 Coiling direction**



**2 Dynamic load \***

Fndyn	1381,35
Fndtol	156,00
Lndyn	89,92
shdyn	11,47

**3 Excursion sh** [ ] mm

**4 Stress cyc. end. N** [ ]

**5 Stress cycle frequ. n** [ ] /

**6 Application temp.** [ ] °C

**Remarks**

Paese d'origine: DE | Numero della tariffa doganale: 73202081

**7 Guidance and seat to DIN EN 13906-1**

mandrel     bush

Buckling length **Lk** at  
 v=0,5 / Bild 5     0,00 mm

**8 Material**

1.4310

**9 Wire or rod surface**

drawn     rolled     metal-cut

**10 Springs deburred**  inside     outside

**11 Surface treatment**  shot peened

**12 Tolerances to DIN EN 15800**

Grade	De,Di,D	L0	F1,F2	e1,e2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**13 Prouction compensation through**

A spring resistance and associated length of tensed spring	L0	<input type="checkbox"/>
A spring resistance, associated length of tensed spring and L0	n, d	<input checked="" type="checkbox"/>
	n, De, Di	<input type="checkbox"/>
Two spring resistances and associated lengths of tensed spring	L0, n, d	<input type="checkbox"/>
	L0,n,De,Di	<input type="checkbox"/>

**14 Setting springs**

All springs which show setting tendency because of their size are pre-set within the production process.

**Prices**

Quantità progressive	Prezzo singolo [EUR]
1	16,040 €
2	12,770 €
3	8,780 €
7	6,920 €
17	5,300 €
37	4,550 €
75	4,490 €
125	4,490 €
175	4,490 €
250	4,490 €
350	4,490 €