


d mm Wire diameter
D mm Mean coil diameter
Dd mm Diameter of mandrel
De mm Outer coil diameter
Dh mm Diameter of bush
e1 mm Perm.dev. perpendicular line
e2 mm Perm.dev. parallel line
F1 N Prestressed spring force
F2 N Loaded spring force

F_n N Maximum force in static use
F_c N Theoretic maximum force at L_c
L0 mm Length of unstressed spring
L1 mm Prestressed spring length
L2 mm Loaded spring length
L_k mm Buckling length
L_n mm Minimum length in static use
L_c mm Block length
n pc. Active coils

nt pc. Total coils
R N/mm Spring rate
S mm Pitch (distance between coils)
s1 mm Prestressed spring deflection
s2 mm Loaded spring deflection
sh mm Maximum stroke in static use
sn mm Maximum spring deflection in static use
Weight g Weight of one spring in grammes

F_{ndyn} N Maximum force in dynamic force
F_{ndtol} N (+/-) tolerance of maximum dynamic force
L_{ndyn} mm Minimum length in dynamic use
sh_{dyn} mm Maximum stroke in dynamic use

* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

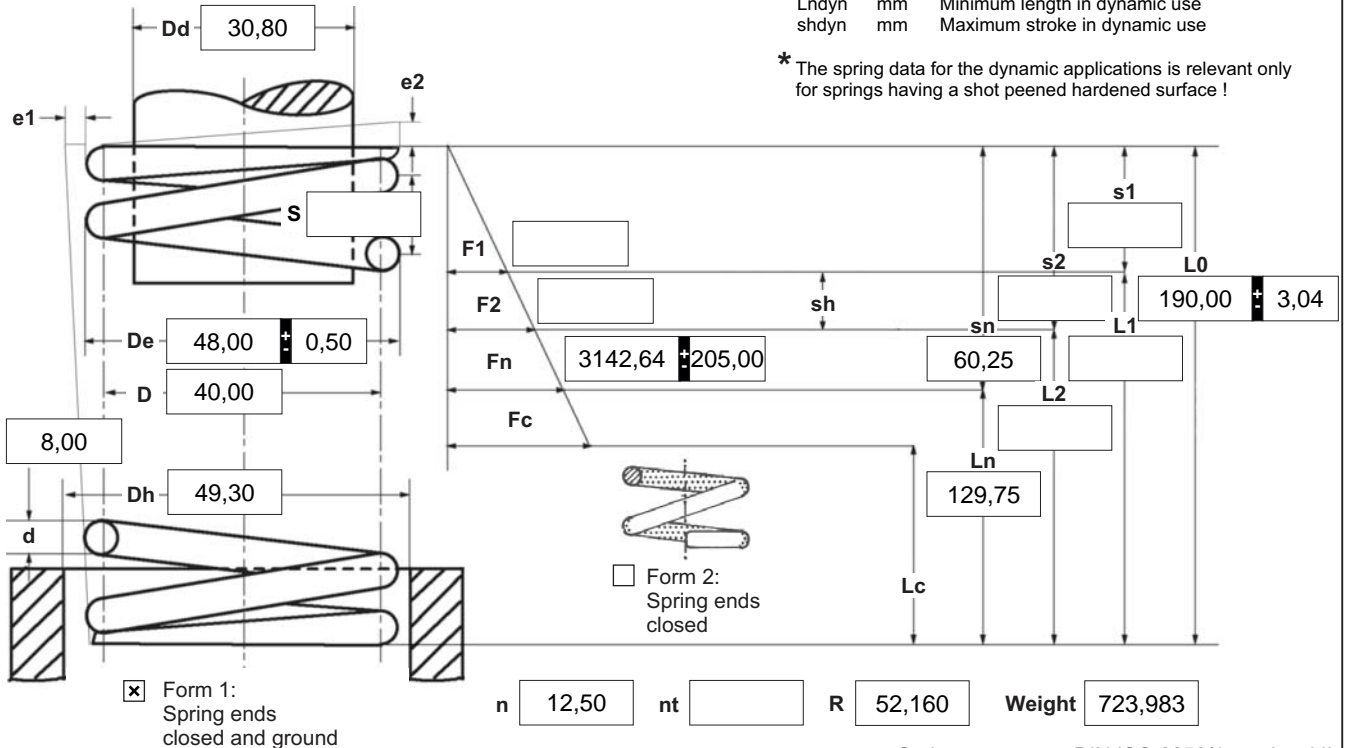

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction

☐ left ☒ right

2 Dynamic load *

F_{ndyn} 2783,78
F_{ndtol} 200,00
L_{ndyn} 136,63
sh_{dyn} 22,24

3 Excursion sh

mm

4 Stress cyc. end. N

5 Stress cycle frequ. n

/

6 Application temp.

°C

Remarks

Kraj pochodzenia: DE | Numer taryfy celnej: 73202081

7 Guidance and seat to DIN EN 13906-1

☐ mandrel ☐ bush

Buckling length L_k at

v=0,5 / Bild 5 0,00 mm



8 Material

EN 10270-1

9 Wire or rod surface

☒ drawn ☐ rolled ☐ metal-cut

10 Springs deburred

☐ inside ☐ outside

11 Surface treatment

☐ shot peened

12 Tolerances to DIN EN 15800

Grade	De,Di,D	L0	F1,F2	e1,e2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

13 Prouction compensation through

A spring resistance and associated length of tensed spring	L0	<input type="checkbox"/>
A spring resistance, associated length of tensed spring and L0	n, d	<input checked="" type="checkbox"/>
	n, De, Di	<input type="checkbox"/>
Two spring resistances and associated lengths of tensed spring	L0, n, d	<input type="checkbox"/>
	L0,n,De,Di	<input type="checkbox"/>

14 Setting springs

All springs which show setting tendency because of their size are pre-set within the production process.

Prices

Grupa ilociowa	Cena jednostkowa [EUR]
1	
2	15,7400 €
3	12,5400 €
7	8,4100 €
17	6,6100 €
37	5,0200 €
75	4,3300 €
125	4,2600 €
175	4,2510 €
250	4,2214 €
350	4,1716 €
	4,0828 €